


SIDELITE ECO

312372.002.1.76 | Pendant luminaires



Pendant luminaires
4051859328179
L 1195, B 295, H 12

pendant
white

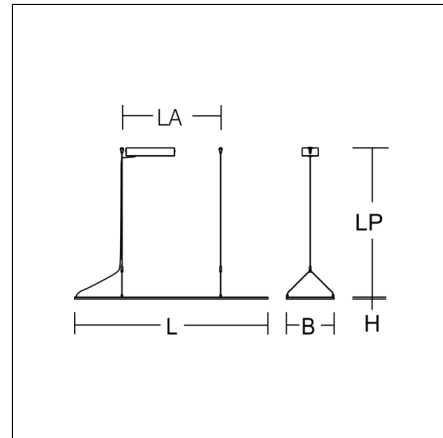

Aesthetically pleasing pendant-mounted surface luminaire with extremely flat profile and progressive LED technology. Frame made of aluminium, powder-coated. Diffuser plastic microprismatic. Lightguide and diffuser made of non-yellowing plastic (PMMA). Lateral light emission (RZB SIDELITE® technology) for homogeneous light distribution. 2-point steel cable suspension, steplessly adjustable. Converter in the canopy. Perfect for office areas ($UGR \leq 19$) and environments with computer screens in accordance with EN 12464-1.

Product specifications

Length L	1195 mm
Width B	295 mm
Height H	12 mm
Suspension length LP	300-1500 mm
Weight	4.33 kg
Light source	LED
Colour temperature	4000 K
Rated luminous flux	3450 lm
System power	29 W
System efficiency	119 lm/W
Glare evaluation UGR (4H 8H)	18,6
Beam angle	96°/92°
Rated life	50000 h (L80/B50)
Colour rendering index (CRI)	80
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 0
Driver	Converter, dimmable
Control	DALI
Voltage	220 - 240 V / 0 Hz, 50 - 60 Hz
Luminaires on B10A fuse	18
Luminaires on B16A fuse	28
Inrush current / Inrush current duration	15 A / 220 μ s
CIE Flux Code / CEN Flux Code	59 87 97 100 100
Type of protection	IP 20
Protection class	II
Filament test	650°C - 30 seconds
Impact resistance	IK03
Ambient temperature	-20 °C ... + 30 °C
Conformity mark	CE