
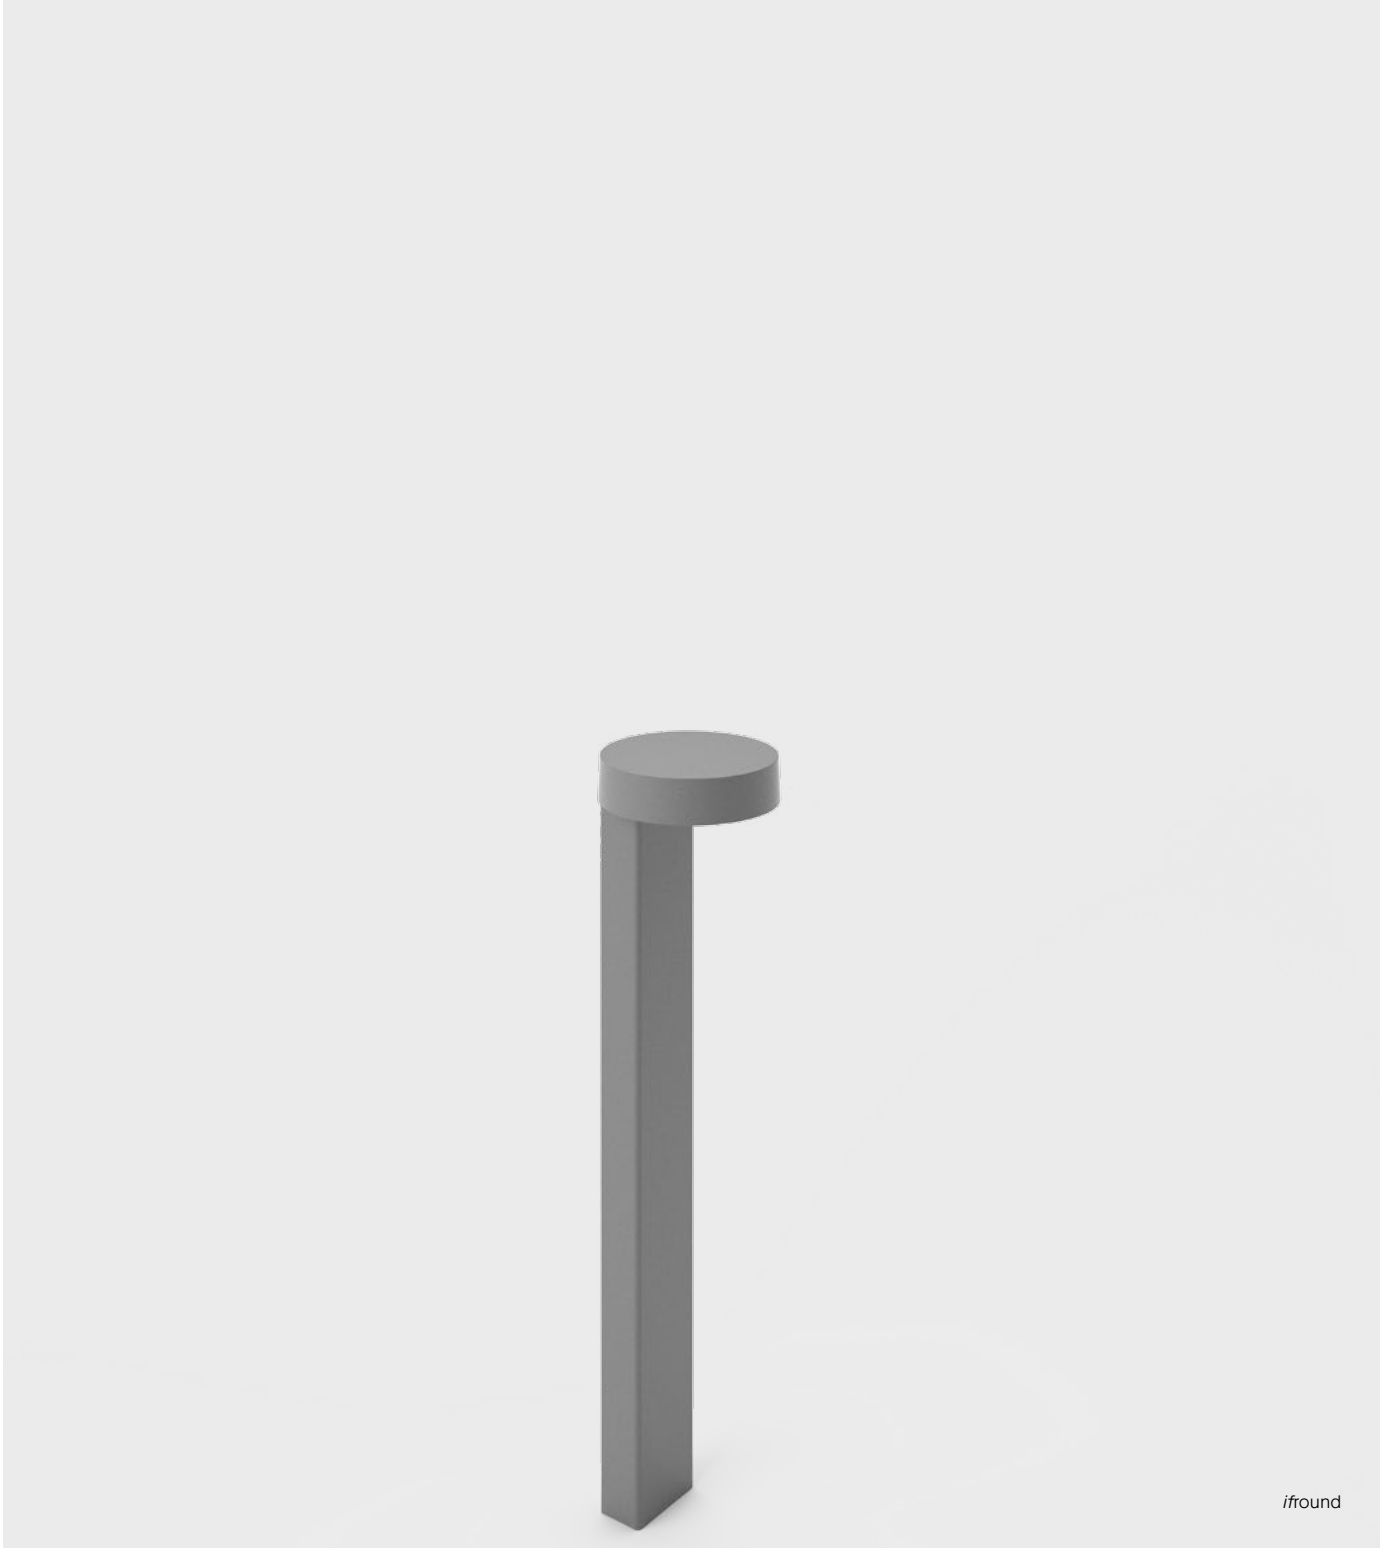




ifround

A-Series



ifround

Model	LPH [m] ^①	 ^③	 ^④	 ^⑤	LU	Luminous Flux [lm]	Power [W]	D1 ^⑥	L2 ^⑥	H1 ^⑥	B1 ^⑥
<i>ifround</i>	0.9	0.02	0.07	3.0	1	190-730	2.5-7.0	140	/	40	75
<i>ifround-W</i>	/	0.02	0.01	0.8	1	190-730	2.5-7.0	140	152	40	75

① Other LPH available upon request ③ Projected windage area [m²] ④ Lateral windage area [m²] ⑤ Max. weight ③ ④ ⑤ Pole included ⑥ [mm]

Available Designs



Single



Wall-mounted

- Housing accommodates 1 lighting unit (LU), 4 LEDs
- Current feed: 200-500 mA, depending on ambient temperature
- Product compatible with A-Series
- Electronic control gear integrated
- Various light distributions for walkway lighting
- Lens made from PMMA
- Cover in single-pane safety glass (ESG), satin-finished
- Die-cast aluminum housing
- Pole made of extruded aluminium profile
- Finish: polyester powder coating, silver grey (RAL 9007 / DB 702), other colours upon request

Accessory



Ground Spike

⊕ □ IP65 RoHS IK08




Colour Temperatures


2,200 K
CRI ≥ 70
 2,700 K
CRI ≥ 70
 3,000 K
CRI ≥ 80
 4,000 K
CRI ≥ 70

CRI ≥ 80, other colour rendering indexes available upon request

Dimension (values see table)

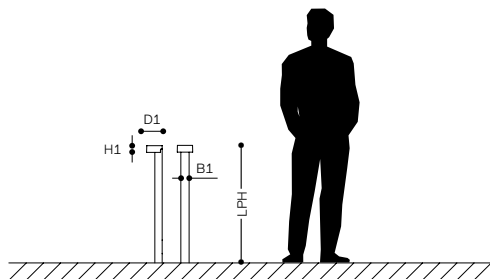


Light Distributions

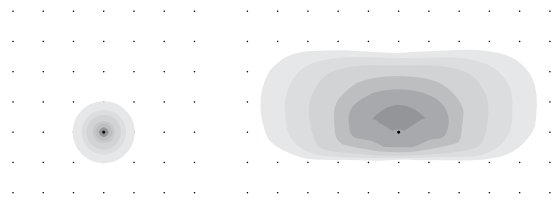

AH02
Symmetric Wide Flood

AP06
Asymmetric Forward Extra Side Throw

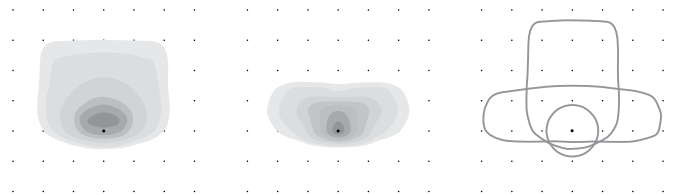

AP07
Asymmetric Extra Forward

AS07
Asymmetric Side Throw

Shape your own light
Combine any light distributions

