



| | |
|---------------------------|---|
| Body finish | <div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> Matt white </div> <div style="text-align: center;"> Matt black </div> </div> <div style="text-align: center; margin-top: 5px;"> Concrete grey </div> |
| Coloured ring | Coloured ring |
| Ring Colour | <div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> Lacquered red </div> <div style="text-align: center;"> Matt orange </div> </div> <div style="text-align: center; margin-top: 5px;"> Spring green Corn yellow </div> <div style="text-align: center; margin-top: 5px;"> Matt white Matt black </div> <div style="text-align: center; margin-top: 5px;"> Concrete grey </div> |
| Beam angle | <div style="display: flex; justify-content: space-between;"> <div style="text-align: center;"> Spot 29° Large 53° </div> <div style="text-align: center;"> Large 47° </div> </div> |
| Accessories | <div style="display: flex; justify-content: space-between;"> <div style="text-align: center;"> Narrow Optics 10° ⁽¹⁾ Satin diffuser </div> <div style="text-align: center;"> Honeycomb louvre </div> </div> |
| Power | 2x13W |
| IP Rating | IP20 |
| Flammable surfaces | Can be installed on normally flammable surfaces (90°) |
| Colour Temperature | 3000K |
| Distribution | Direct |
| Weight | 0.4 kg |
| Depth downlight | Depth 50 mm |




(1) With this accessory there is no need to order coloured rings with optics

Product description


Recessed LED Downlight with two adjustable spotlights with proprietary joint allowing for 360° horizontal and +/-85° vertical adjustment. Optics in Spot (29°), Medium (47°) and Large (53°) and remote power supply to be ordered separately. Optics come complete with a decorative ring that is available in seven liquid-coated finish options. The luminaire is available in matte white, matte black and concrete grey. Accessories include narrow optics attachment, honeycomb louvre and satin diffuser. Supplied in 3000K and CRI85 as standard. Available in CRI95, 2700K/4000K and DALI/PUSH/1-10V/PUSH dimming options on request. Ingress protection of IP20.

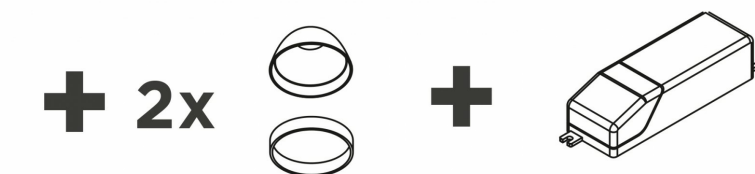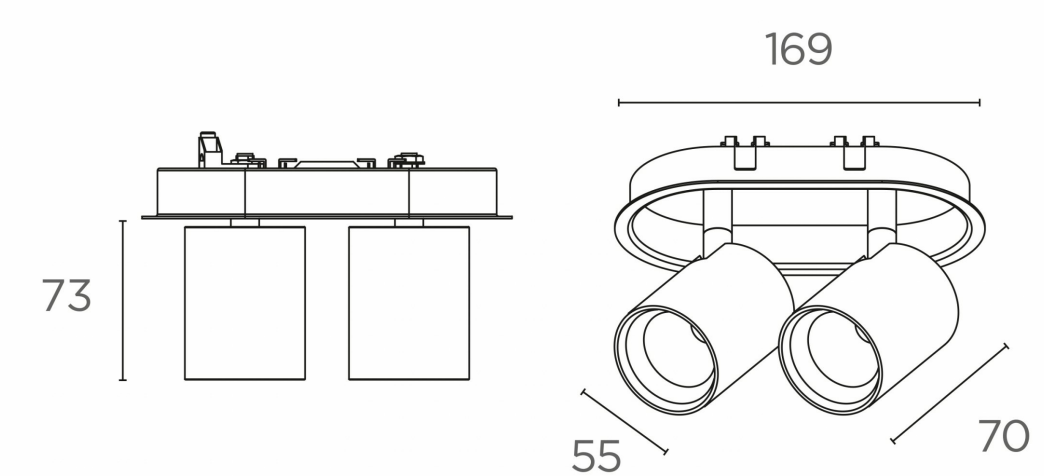


Photometric information

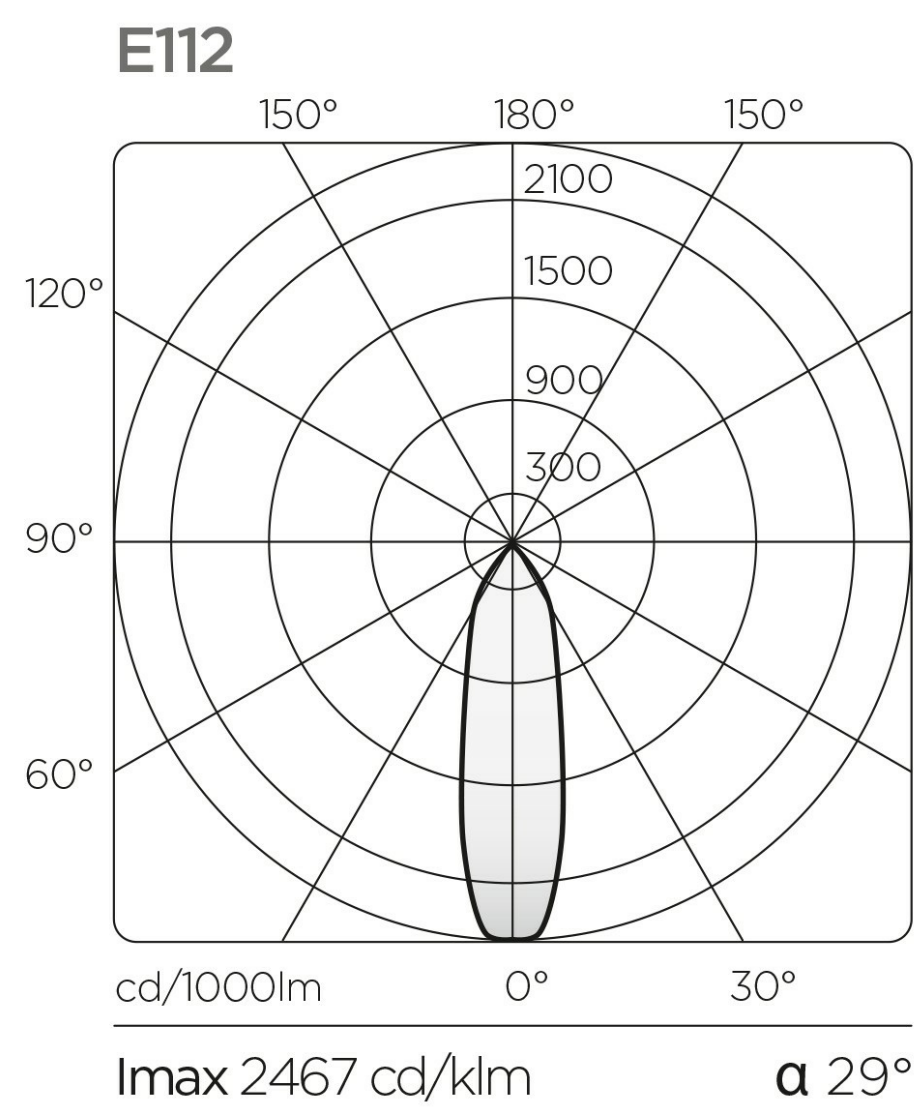

| h (m) | Ø | Em (lux/klm) |
|-------|------|--------------|
| h1 | 0,52 | 2467 |
| h2 | 1,04 | 617 |
| h3 | 1,57 | 274 |
| h4 | 2,09 | 154 |
| h5 | 2,61 | 99 |

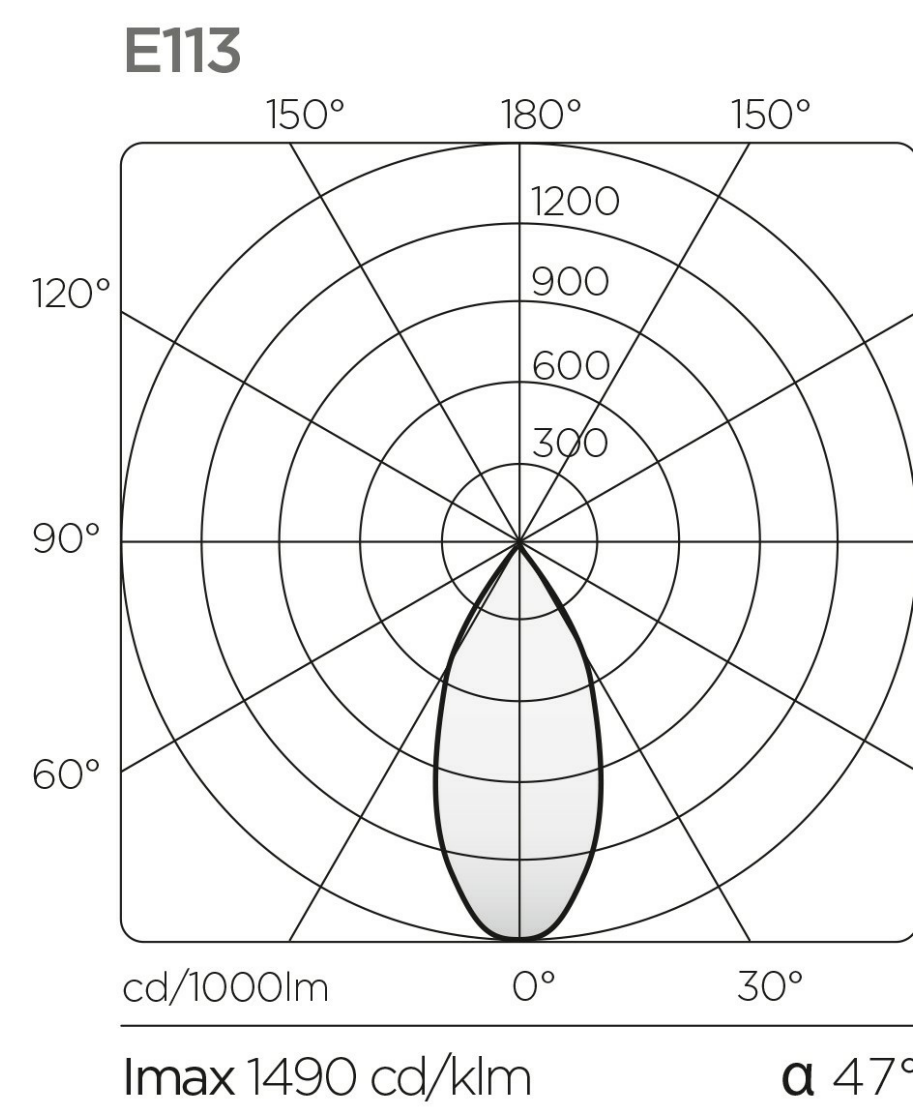


| h (m) | Ø | Em (lux/klm) |
|-------|------|--------------|
| h1 | 0,87 | 1490 |
| h2 | 1,74 | 372 |
| h3 | 2,61 | 166 |
| h4 | 3,48 | 93 |
| h5 | 4,35 | 60 |

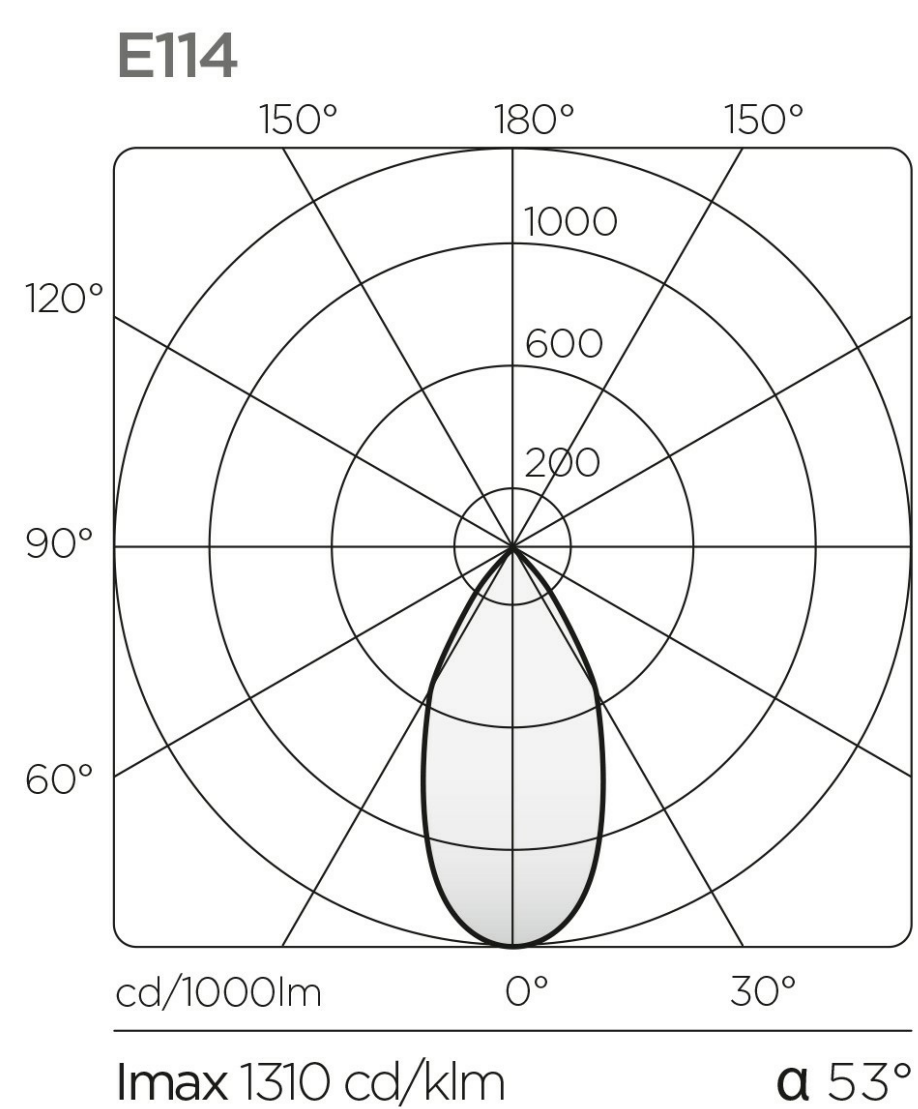

| h (m) | Ø | Em (lux/klm) |
|-------|------|--------------|
| h1 | 1,00 | 1310 |
| h2 | 2,00 | 327 |
| h3 | 3,01 | 146 |
| h4 | 4,01 | 82 |
| h5 | 5,01 | 52 |


Accessories

9Q31252-Narrow Optics 10°

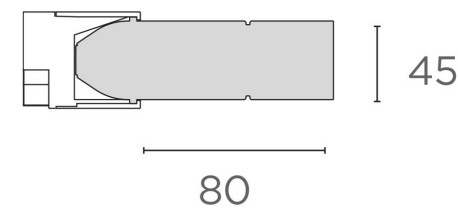

Matt black. With this accessory there is no need to order coloured rings with optics

9G025-Honeycomb louvre

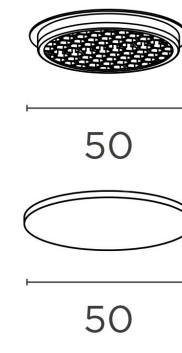

The accessory consists of a protective screen and black honeycomb grid.

9G026-Satin diffuser

