

Handrail Lighting System

eWO


energylight
knowledge | solutions



eWO

energylight
knowledge | solutions



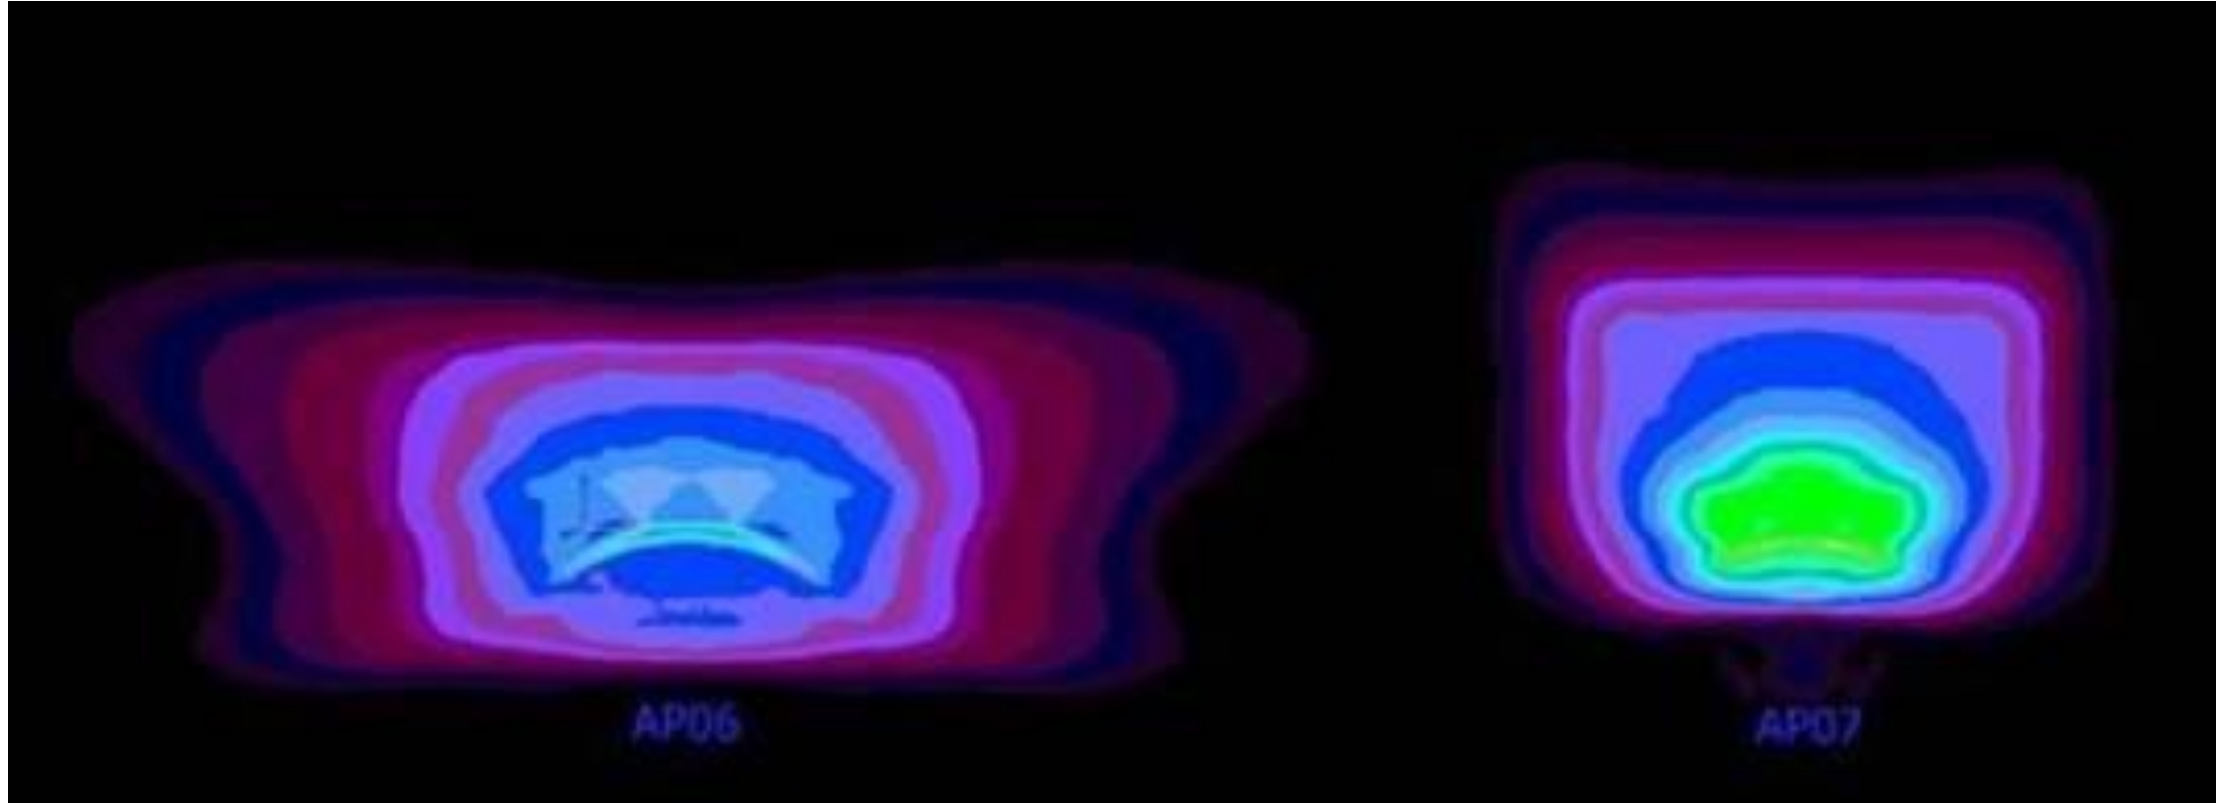

IP67 protection rating



200÷500mA current feed

Up to 150lm/W (3000K CRI80)

Maximum distance between driver and the last luminaire in a circuit:


- Extra low voltage supply system <75V d.c.: 90m
- Low voltage supply system max 300V d.c.:400m


3x1.5sqmm wire section

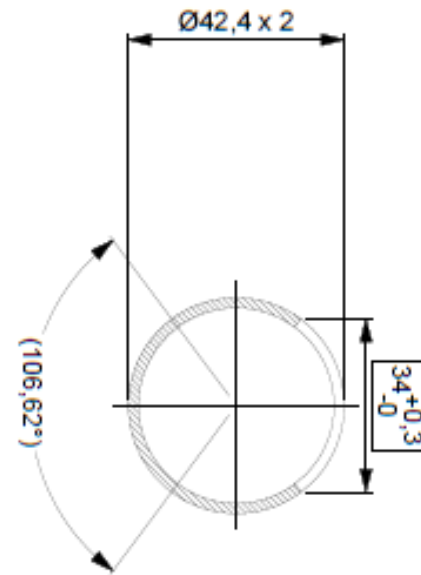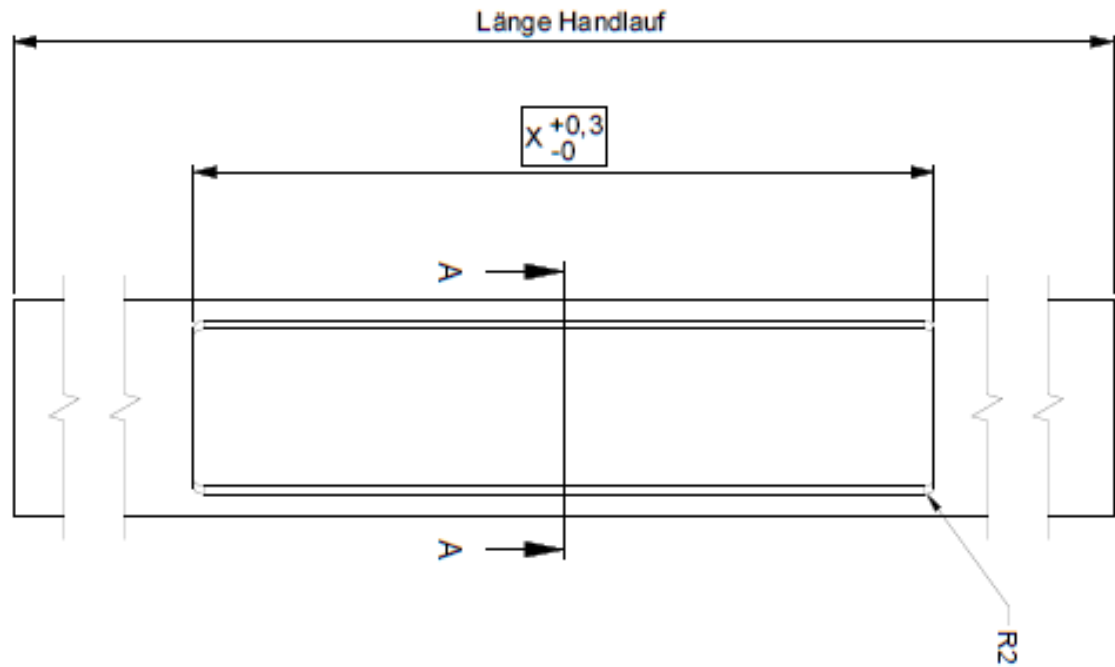

4Led
3Led
2Led
1Led

X= 165,5mm
X= 145,5mm
X= 125,5mm
X= 105,5mm

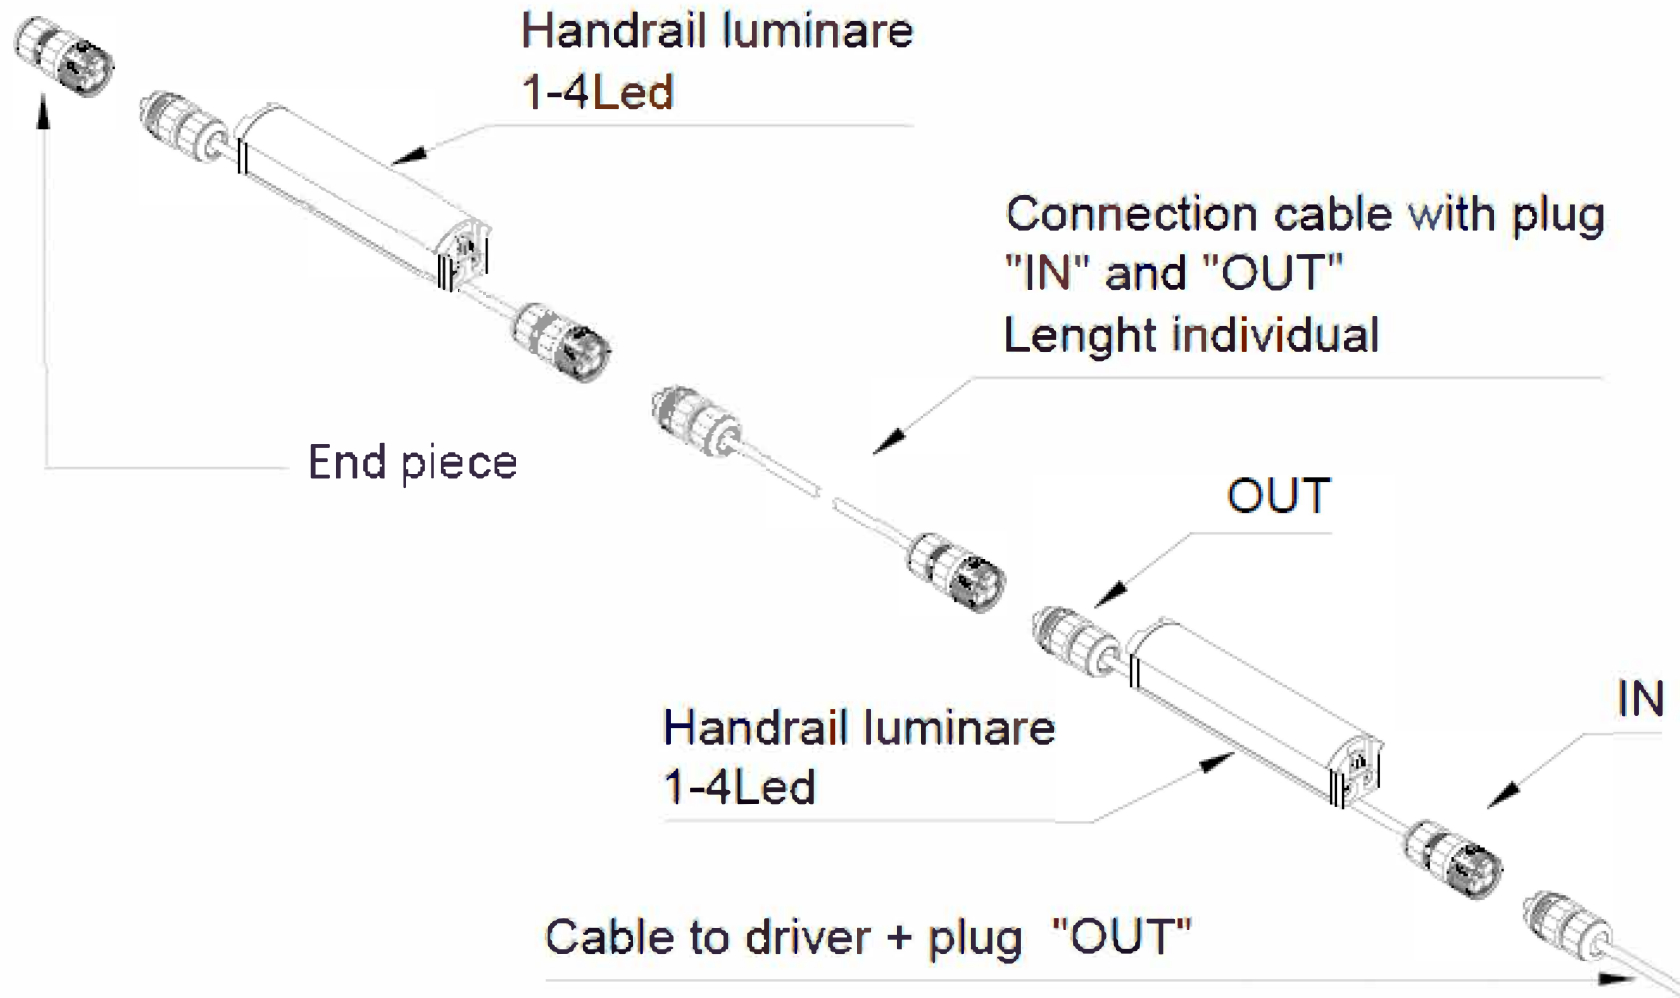

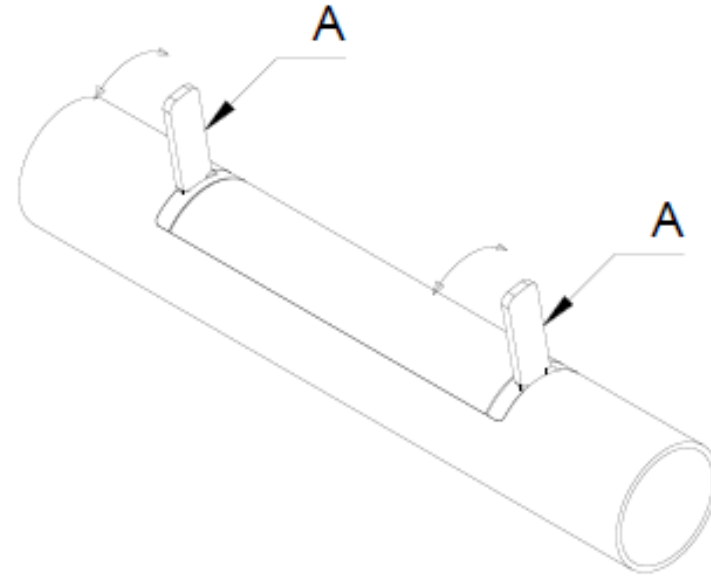

±6° tilting on site

