



# REVOLED-S v.2 RAF

Surface Mounted 128 W LED High Bay Luminaire

Order Code : 3099177  
Product Code : RVL 128U 40TF00 XL 15K6 V,2



## Product Data

### Standard Features

Housing	: Aluminium profile housing
Diffuser	: Tempered glass with security film
Optic	: Micro silver reflector, extra narrow angle
IP Grade	: IP65
Installation	: Surface mounted
Light Source	: Mid Power LED


### Optical & Electrical Features

Power Consumption	: 128,4 W
Final Luminous Flux	: 15669,7 lm
Efficacy	: 121,9 lm/W
Input Voltage	: 220-240 V
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 2 kV
Drive Current	: 960 mA
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

### Other Features & Conditions

Operating Temperature Range	: -20 °C/+45 °C
Operating Temperature Range With Emergency Kit	: +5 °C/+30 °C
Impact Resistance	: IK09
Led Life Time - L70	: > 60.000 hours @Ta= 45 °C

## Photometric Curve

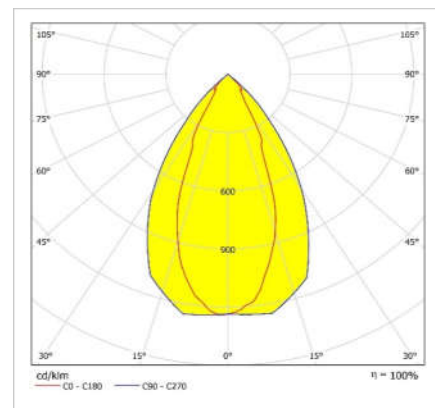



### Optional Features

Correlated Color Temperatures	: 3000K, 5700K, 6500K
Emergency Kit Options	: 1, 3 hours
DALI Option	: Yes

# REVOLED-S v.2 RAF

Surface Mounted 128 W LED High Bay Luminaire

3099177 RVL 128U 40TF00 XL 15K6 V.2

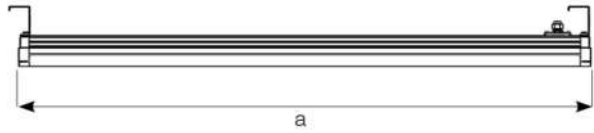

### Dimension (mm)


	a	b	h
Standard	1139	220	74
With Emergency Kit (1, 3 hrs.)	1139	220	74
DALI	1139	220	74

### Weight (gr)

Standard	12,9
With Emergency Kit (1, 3 hrs.)	13,6 - 13,8




## Suspension Set



Busbar Hanger Set

Product Code : 3080654


a	b	c	Weight (gr)
62mm	48mm	162mm	312

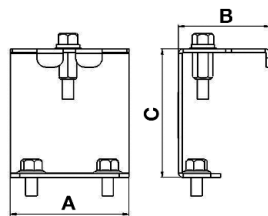

Cable Tray and Wall Hanger Set

Product Code : 3080655

a	b	c	Weight (gr)
62mm	48mm	70mm	191



Wall-Mounted Hanger Set

With 10° Angular Adjustment Steps

Product Code : 3080656

a	b	c	Weight (gr)
110mm	89mm	290mm	-

