


# HEMIS square

## 312187.002.1 | Surface-mounted luminaires



Ceiling luminaires  
4051859223795  
L 250, B 250, H 33

Ceiling mounting  
white

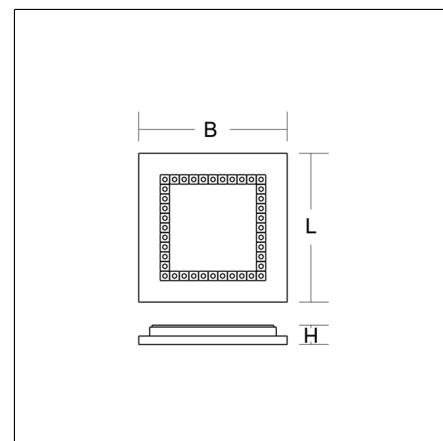

Glare-free LED ceiling luminaire with optical lens system. Base: metal, powder-coated, with bayonet fixing. Housing: plastic (polycarbonate). Housing and diffuser are screwed together. Diffuser with optic lenses. Big terminal block; ideal for through-wiring. Sealing strip on the back of the luminaire connects seamlessly with the ceiling. Easy installation with Plug & Play plug connection. Thanks to UGR < 22 ideal for corridors, stairways, shops, schools, meeting rooms, rest areas.

### Product specifications

Length L	250 mm
Width B	250 mm
Height H	33 mm
Weight	830 g
Light source	LED
Colour temperature	4000 K
Rated luminous flux	1600 lm
System power	12 W
Luminaire efficacy	133 lm/W
Glare evaluation UGR (4H 8H)	19,9
Rated life	40000 h (L80/B10)
Colour rendering index (CRI)	80
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 50 Hz
Luminaires on B10A fuse	24
Luminaires on B16A fuse	39
Luminaires on C10A fuse	41
Luminaires on C16A fuse	49
Inrush current / Inrush current duration	60.8 A / 5 µs
CIE Flux Code / CEN Flux Code	86 99 100 100 100
Type of protection	IP 40
Protection class	I
Filament test	850°C - 30 seconds
Impact resistance	IK06 (1 Joule)
Safety marks	F-mark
Conformity mark	CE, EAC