


HEMIS round

312186.002 | Surface-mounted luminaires



Ceiling luminaires
4051859223764
D 400, H 33

Ceiling mounting
white

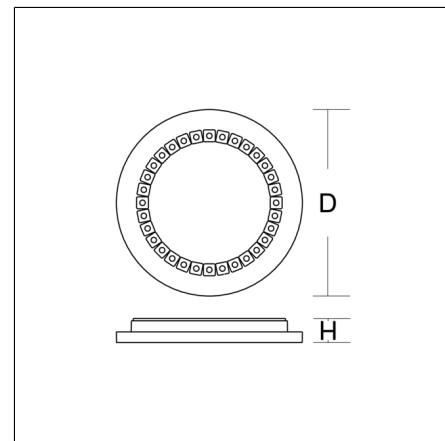

Glare-free LED ceiling luminaire with optical lens system. Base: metal, powder-coated, with bayonet fixing. Housing: plastic (polycarbonate). Housing and diffuser are screwed together. Diffuser with optic lenses. Big terminal block; ideal for through-wiring. Sealing strip on the back of the luminaire connects seamlessly with the ceiling. Easy installation with Plug & Play plug connection. Thanks to UGR < 22 ideal for corridors, stairways, shops, schools, meeting rooms, rest areas.

Product specifications

Diameter D	400 mm
Height H	33 mm
Weight	1.88 kg
Light source	LED
Colour temperature	3000 K
Rated luminous flux	2600 lm
System power	25 W
Luminaire efficacy	104 lm/W
Glare evaluation UGR (4H 8H)	19,4
Rated life	40000 h (L80/B10)
Colour rendering index (CRI)	80
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 50 Hz
Luminaires on B10A fuse	23
Luminaires on B16A fuse	36
Luminaires on C10A fuse	23
Luminaires on C16A fuse	36
Inrush current / Inrush current duration	14.6 A / 5 µs
CIE Flux Code / CEN Flux Code	86 99 100 100 100
Type of protection	IP 40
Protection class	I
Filament test	850°C - 30 seconds
Impact resistance	IK06 (1 Joule)
Safety marks	F-mark
Conformity mark	CE, EAC