



# ENERGYLINE UGR LOUVRE: BLACK 80°

## WHAT IS IT?


A low glare, linear louvre solution. The multi-cell louvre complete with lens technology complements the Energyline family.

Square louvre openings achieve excellent cut-off angles below 45°.

Louvre modules can be built in 160mm increments. Cover profile may be used to enable exact overall lengths or customise the module arrangements.

A desirable feature of the Energyline louvre is the anti static coating which eliminates accumulation of dust.

lm/m	Efficacy (lmW)	L80 B10
2200	105	>72,000h
2700	102	>72,000h

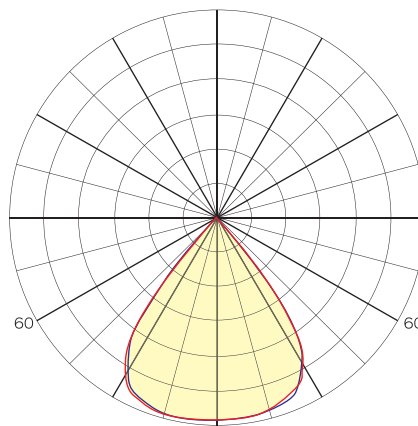

## Optimal Use

- ▶ Optimal increment for louvre section is 1120mm, this ensures the least amount of joints between sections and provides the best luminaire aesthetically

## Ideal Applications

- ▶ Boardrooms
- ▶ Education facilities
- ▶ Office lighting

## Features

- ▶ Low glare
- ▶ 80° beam angle
- ▶ IP4x
- ▶ Anti static
- ▶ High efficiency over 90%, initial testing at 100.2lmW
- ▶ Can be combined with cover profile
- ▶ Complete cut off above 45°
- ▶ UGR <16
- ▶ Disassembly not required

## Availability

- ▶ Available in 55, 75 mm and 108 S and H profiles
- ▶ Suspended available via Wire or Rod
- ▶ Surface Mounted available via surface bracket system
- ▶ Up to 2700lm per metre