

LED  
no  
compromise

10 Year  
Warranty

60598  
AS/NZS

IP4X

COI  
compliant

## Application

Viline means visual comfort, linear lighting in T-rail for workplaces, education or healthcare facilities over workstations, learning spaces or in long corridors anywhere requiring strong linear light.

## Installation

Designed for recess in standard T-Rail ceilings, 1200mm and 600mm lengths to configure with ceiling. 100mm wide requires additional T-rail to be installed with fixture.

## Design


End-to-end mounting recessed in T-rail creates effective linear lighting. Only 100mm wide provides the linear effect and 1200 or 600 modules provide flexibility in layout and design.

## Sustainability

Designed for long life with Tridonic/Philips/Osram remote driver for easy replacement. Easily reused with new components and recycled at end of life.

## Specification Data

|                              |                           |
|------------------------------|---------------------------|
| Colour Temperature           | 4000K                     |
| Colour Rendering             | 95Ra, R9>80               |
| Weight                       | 1200mm 1.2kg, 600mm 0.7kg |
| LED Lifetime                 | L95 @50,000h              |
| Driver Lifetime              | 100,000h                  |
| Cyanosis (COI)               | 0.156 (<3.3)              |
| Flicker                      | PSTLM <1.0   SVM <0.4     |
| M/P Ratio m-EER (WELLS)      | 0.8                       |
| M/P Ratio m-DER (CIE S 0-26) | 0.72                      |
| SDCM                         | 3-Step MacAdam            |

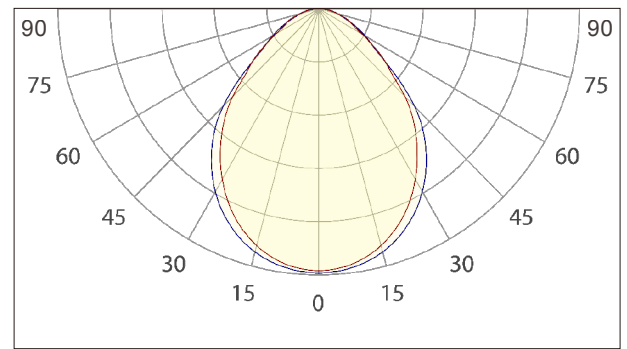

## Product Selector

| Code    | DALI | Casambi | Size (mm) | Lumens | (mA) | Wattage | (lm/W) | Application Notes  |
|---------|------|---------|-----------|--------|------|---------|--------|--|
| VL12111 | /DD  | /CA     | 1200      | 1100   | 300  | 11      | 100    | MH 2.4m, End to End Mounting   Circulation Space, Workplace, Healthcare, Education |
| VL12113 | /DD  | /CA     | 1200      | 1300   | 375  | 13      | 100    | MH 2.7m, End to End Mounting   Circulation Space, Workplace, Healthcare, Education |
| VL12118 | /DD  | /CA     | 1200      | 1800   | 550  | 18      | 100    | MH 2.7m, End to End Mounting   Workplace, Healthcare, Education                    |
| VL12127 | /DD  | /CA     | 1200      | 2700   | 800  | 26      | 103    | MH 3.0m, End to End Mounting   Workplace, Healthcare, Education                    |
| VL06155 | /DD  | /CA     | 1200      | 550    | 150  | 6       | 91     | MH 2.4m, End to End Mounting   Circulation Space, Workplace, Healthcare, Education |
| VL06165 | /DD  | /CA     | 1200      | 700    | 200  | 7       | 100    | MH 2.7m, End to End Mounting   Circulation Space, Workplace, Healthcare, Education |
| VL06190 | /DD  | /CA     | 1200      | 900    | 250  | 9       | 100    | MH 2.7m, End to End Mounting   Workplace, Healthcare, Education                    |
| VL06113 | /DD  | /CA     | 1200      | 1400   | 400  | 15      | 93     | MH 3.0m, End to End Mounting   Workplace, Healthcare, Education                    |

## Accessories

## Custom Options

SkyBlue® Tunable Spectrum 27 - 40K m-EER 0.47 - 0.92 | m-DER 0.42 - 0.83

SkyBlue® Tunable Spectrum 27 - 35K m-EER 0.47 - 0.83 | m-DER 0.42 - 0.75

CCT, Colour, Output

Red list free - Living Building Challenge

