


# IN

## A-Series



Model	 <sup>Ⓔ</sup>	LU	Luminous Flux [lm]	Power [W]	L1 <sup>Ⓔ</sup>	B1 <sup>Ⓔ</sup>
IN 1	4.5	1	340-2,100	5-20	342	86
IN 2	6.5	2	670-3,500	10-35	502	86
IN 3	8.5	3	1,000-5,300	15-55	662	86
IN 4	10.5	4	1,400-7,000	20-75	822	86
IN 5	12.5	5	1,700-7,900	25-85	982	86

## Models / Equipment Variations



IN 1 → 1 Lighting unit



IN 2 → 2 Lighting units



IN 3 → 3 Lighting units



IN 4 → 4 Lighting units



IN 5 → 5 Lighting units

## Available Designs



Recessed in-ground IN 1-IN 5-V01 (double LED rows)



Recessed in-ground IN 1-IN 5-V02 (central, single LED row)



Recessed ceiling and in-ground IN 1-IN 3-V03 (single, staggered LED row)

## Accessory





Plasterkit




Stainless steel frame

## Dimension (values see table)

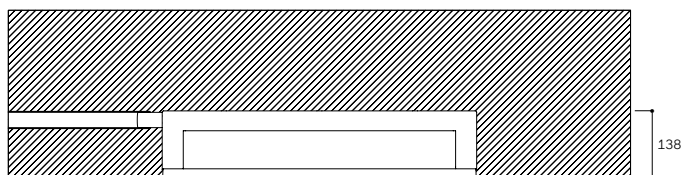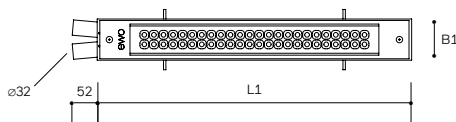

- Housing accommodates up to 5 lighting units (LU), 8 / 16 / 32 / 48 / 64 / 80 LEDs
- Current feed: 200-500 mA, depending on ambient temperature
  - IN 1: 200-500 mA / IN 2: 200-400 mA / IN 3: 200-400 mA
  - IN 4: 200-400 mA / IN 5: 200-350 mA
- Product compatible with A-Series and T-Series (LightTile)
- Electronic operating device with DALI, 1-10 V interface, stand-alone programming or Line Switch available upon request
- Constant lumen output (CLO) and emergency power supply (AC/DC) available upon request
- Various light distributions for area, walkway or indoor lighting
- Lighting unit adjustable +/- 5°
- Lens made from PMMA
- Cover in single-pane safety glass (ESG)
- Housing in aluminium, coated black matt RAL 9005

IP67 RoHS IK10



## Colour Temperatures



Other colour rendering indexes available upon request

## Light Distributions (also available in satiné version – spot optics excluded)

