

R160

A-Series



Materials / Characteristics

- Housing in aluminium and stainless steel, internally black matt coated RAL 9005
- Recessed mounting sleeve in stainless steel
- Cover in tempered safety glass (3,000 kg pressure load capacity)
- Precision lenses in PMMA
- Screws in stainless steel
- Pre-wired supply cable 0.50 m, complete with water stop device
- Cable gland
- Protective vent
- Lighting unit steplessly adjustable $\pm 15^\circ$ in all directions

Application Area

- Architectural lighting
- Object and effect lighting
- Floor mounting

Accessories

- Fixed output or dimmable driver
- DMX driver and controller
- Connection cable
- Electrical connector


Light Source

- 16 high-power LEDs
- Delivered lumens 520–1,750 lm
- System Wattage 9.7–19 W
- Current Feed 200–400 mA

Max. Weight


- 6.5 kg external driver
- 10.5 kg complete with driver

Colour Temperatures



Standard CRI ≥ 80 , other colour rendering indexes available upon request

Light Distributions

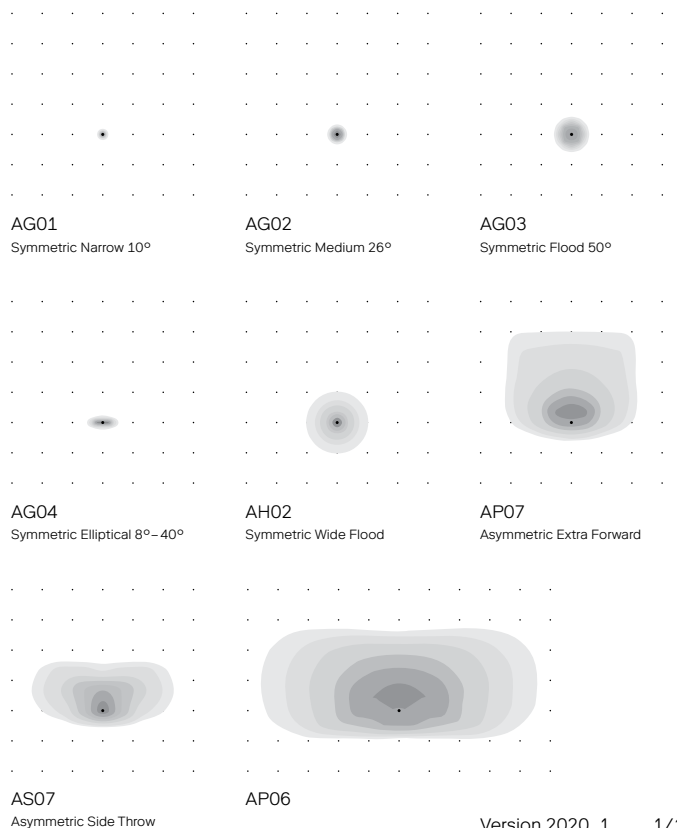

IP67 RoHS IK10

