ARCADIAN
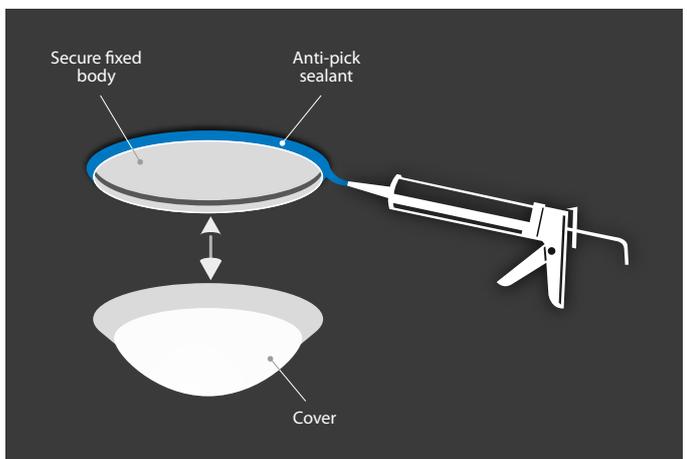
COLOUR OPTIONS
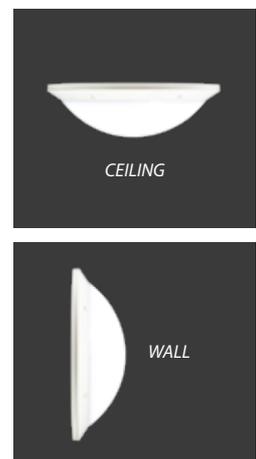
Supplied finished in RAL 9010 white as standard. Other colour options are available to special order*.

* Minimum order quantity applies
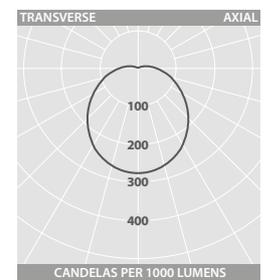
EASY COVER REMOVAL

Secure fixed body

Anti-pick sealant

Cover

MOUNTING OPTIONS

CEILING

WALL

PHOTOMETRIC GUIDE

TRANSVERSE   AXIAL

100

200

300

400

CANDELAS PER 1000 LUMENS

LED	3000K (lm)	4000K (lm)
21W	2555	2705
27W	3375	3565

LED LIGATURE-RESISTANT LUMINAIRES

IP66 **IK11** **UKCA** **CE** **LED**

SPECIFICATION

- Strong spun steel body
- Injection moulded 5mm thick polycarbonate cover with white painted trim as standard (RAL 9010). Other colour trim options available to special order
- Ligature-resistant design
- Anti-pick sealant can be used to seal the body whilst still allowing the cover to be removed for maintenance
- Tamper-resistant pin Torx screw fixings (requires T25 tool - see accessory table)
- SmartScan wireless technology removes the need for control cabling. Ideal for retro-fit
- SmartScan Radar versions with sensor discretely hidden behind the cover
- Fitted with 3000K or 4000K LEDs

LED CHARACTERISTICS

CRI	80
COLOUR TEMPERATURE	3000K/4000K
RATED LIFE (HOURS)	100K L80/B10
PROTECTION	LUX GUARD
DRIVER EFFICIENCY	>85%
REPLACEABLE	YES
POWER FACTOR	>0.95
LL/CW	104.9
ENERGY EFFICIENCY CLASSIFICATION	C

For LED characteristics explanation see
www.thorlux.com/led-guide

SmartScan Configurations

Find out more at **www.thorlux.com/smartscan**

RANGE

LED	CAT. No.	CIRCUIT	APPROX. kg
21W 3000K	**AN 17074**	R/L/A	3.1
21W 4000K	**AN 17075**	R/L/A	3.1
27W 3000K	**AN 19208**	R/L/A	3.1
27W 4000K	**AN 19209**	R/L/A	3.1

CIRCUIT TYPE - suffix catalogue number with:
R - SmartScan Radar / **L** - non-dimming (LED) / **A** - dimming (DALI)
e.g. **AN 17074R** etc.
SmartScan Radar add 0.1kg to weights listed.

EMERGENCY VERSION - prefix catalogue number with:
TAN - AutoTest (Not available when selecting the **'R'** suffix)
WAN - SmartScan
e.g. **WAN 17074R** etc.
Add 0.3kg to weights listed.

INTEGRAL NIGHT LIGHT VERSION - suffix catalogue number with:
N e.g. **AN 17074LN** etc.

ACCESSORY

DESCRIPTION	CAT. No
T25 pin Torx bit (Suitable for magnetic bit holder)	**KEY 16976**

DIMENSIONS

445 dia. — 138 — 354 — 8 x 7 dia. fixing holes — 354 — 21 dia. rear conduit entry