


ewo

energylight

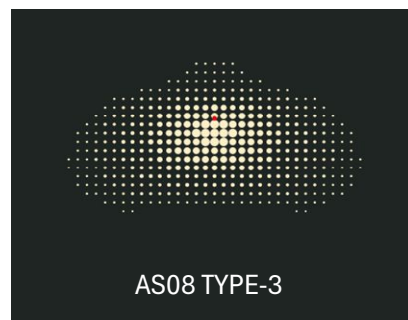

DESCRIPTION

EWO F-SYSTEM EXTRA SMALL AS08 (TYPE-3) 16LED

1 Lighting unit (16LED)
Aluminum die-cast housing LM6, IP66
Polyester powder-coated
Colour: RAL9005, Jet Black
Lens cover glass visor, IK08
Backlight Shield (RBL)
Weight: 7.9kg

Power: 26W, Luminous flux: 2660lm
Efficacy: 102.3lm/W
Output current: 500mA
Input voltage: 80-240Vac
Integrated surge protection 10kV
Protection Class I
Power factor = 0.98
Total harmonic distortion (THD) = 7%
Colour Temperature 3000K, CRI>70

Options:

Control: DALI or Switched
Mounting: Single or Double
76mm OD pole top or wall-mount
Fixed tilt 0° full cut off
other options available - consult Energylight

CONFIGURATIONS



Single



Double



Wall-mounted



Backlight Shield (RBL)

MEASUREMENTS

