


ewo

energylight

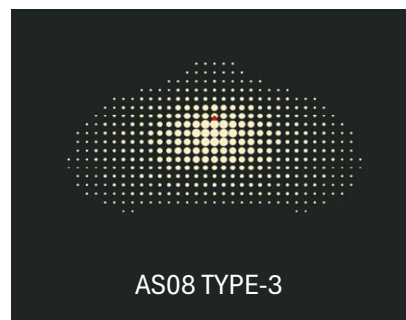

## DESCRIPTION

EWO F-SYSTEM EXTRA SMALL AS08 (TYPE-3) 32LED

2 Lighting units (32LED)  
Aluminum die-cast housing LM6, IP66  
Polyester powder-coated  
Colour: RAL9005, Jet Black  
Lens cover glass visor, IK08  
Backlight Shield (RBL)  
Weight: 7.9kg

Power: 50W, Luminous flux: 5320lm  
Efficacy: 102.3lm/W  
Output current: 500mA  
Input voltage: 80-240Vac  
Integrated surge protection 10kV  
Protection Class I  
Power factor = 0.98  
Total harmonic distortion (THD) = 7%  
Colour Temperature 3000K, CRI>70

Options:

Control: DALI or Switched

Mounting: Single or Double

76mm OD pole top or wall-mount

Fixed tilt 0° full cut off

other options available - consult Energylight

## CONFIGURATIONS



Single



Double



Wall-mounted



Backlight Shield (RBL)

## MEASUREMENTS

