


ewo

energylight

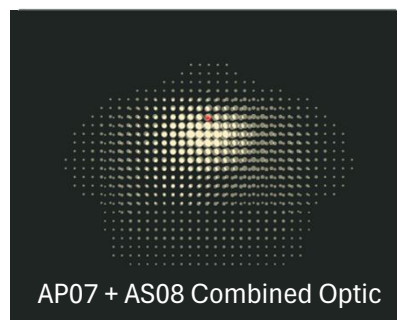

DESCRIPTION

EWO F-SYSTEM SMALL AS08 +AP07 (TYPE 3 & 4) 48LED

3 Lighting units - AS08 (1 Unit) AP07 (2 Units)

Aluminum die-cast housing LM6, IP66

Polyester powder-coated

Colour: RAL9005, Jet Black

Lens cover glass visor, IK08

Weight: 9kg

Power: 73W, Luminous flux: 7693lm

Efficacy: 105.4lm/W

Output current: 500mA

Input voltage: 80-240Vac

Integrated surge protection 10kV

Protection Class I

Power factor = 0.98

Total harmonic distortion (THD) = 7%

Colour Temperature 3000K, CRI>70

Options:

Control: DALI or Switched

Mounting: Single or Double

76mm OD pole top or wall-mount

Fixed tilt 0° full cut off

other options available - consult Energylight

CONFIGURATIONS



Single



Double



Wall-mounted



Backlight Shield (RBL)

MEASUREMENTS

