


ewo

energylight

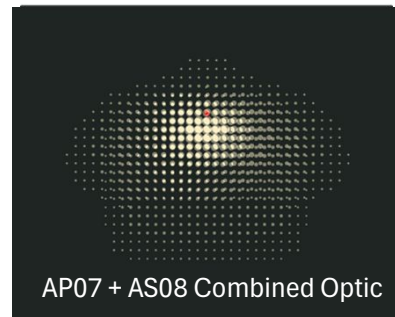

DESCRIPTION

EWO F-SYSTEM EXTRA SMALL AS08 +AP07
(TYPE 3 & 4) 32LED

2 Lighting units - AS08 (1 Unit) AP07 (1 Unit)
Aluminum die-cast housing LM6, IP66
Polyester powder-coated
Colour: RAL9005, Jet Black
Lens cover glass visor, IK08
Weight: 7.9kg

Power: 50W, Luminous flux: 5176lm
Efficacy: 103.5lm/W
Output current: 500mA
Input voltage: 80-240Vac
Integrated surge protection 10kV
Protection Class I
Power factor = 0.98
Total harmonic distortion (THD) = 7%
Colour Temperature 3000K, CRI>70

Options:

Control: DALI or Switched

Mounting; Single or Double

76mm OD pole top or wall-mount

Fixed tilt 0° full cut off

other options available - consult Energylight

CONFIGURATIONS



Single



Double



Wall-mounted



Backlight Shield (RBL)

MEASUREMENTS

