


eWO

energylight

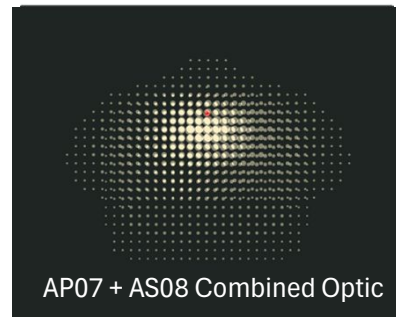

AP07 + AS08 Combined Optic

## DESCRIPTION

EWO F-SYSTEM EXTRA SMALL AS08 +AP07  
(TYPE 3 & 4) 32LED

2 Lighting units - AS08 (1 Unit) AP07 (1 Unit)  
Aluminum die-cast housing LM6, IP66  
Polyester powder-coated  
Colour: RAL9005, Jet Black  
Lens cover glass visor, IK08  
Weight: 7.9kg

Power: 69W, Luminous flux: 7975lm  
Efficacy: 114.9lm/W  
Output current: 700mA  
Input voltage: 80-240Vac  
Integrated surge protection 10kV  
Protection Class I  
Power factor = 0.98  
Total harmonic distortion (THD) = 7%  
Colour Temperature 3000K, CRI>70

### Options:

Control: DALI or Switched  
Mounting; Single or Double  
76mm OD pole top or wall-mount  
Fixed tilt 0° full cut off  
other options available - consult Energylight

## CONFIGURATIONS



Single



Double



Wall-mounted

## MEASUREMENTS

